

MAXNET®

RF & L-Band Signal Management

Patented
U.S.# 6,842,348



5RU Standard RF Chassis
(front view)

Connector & Terminator Options

Connectors:

F:

- ▶ The arc center seizing pin design increases the contact to the male center conductor while the flat-faced F port barrel provides a high quality ground connection.

BNC:


- ▶ The high performance 75 ohm BNC connector ensures a solid mechanical connection while maintaining excellent RF specifications.



Terminators:

F & BNC:

- ▶ RFI-tight (> 100 dB), 75 ohm terminator
- ▶ Ideal for CATV headend environments

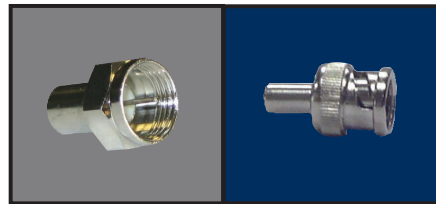

F & BNC Terminator Specifications

| PART # | TYPE | RETURN LOSS | | |
|-----------|------|-------------|--------------|---------------|
| | | 5-1000 MHz | 950-1450 MHz | 1450-2150 MHz |
| MNF-75T | F | > 30 dB | > 28 dB | > 25 dB |
| MNBNC-75T | BNC | > 30 dB | > 22 dB | > 18 dB |

Ordering Information

| Part Number | Description |
|-------------|---------------------------------|
| MNF-75T | 75 ohm RFI Tight F Terminator |
| MNBNC-75T | 75 ohm RFI Tight BNC Terminator |

Specifications subject to change without notice.



ISO
9001
REGISTERED

1-501 Clements Road West, Ajax, ON L1S 7H4 Canada
Tel (905) 428-6068 Toll Free (800) 565-7488 Fax (905) 427-1964 Toll Free Fax (866) 427-1964
www.atxnetworks.com support@atxnetworks.com

Printed in Canada

Rev. 12/08 (ANW0667)