

SCN

RF & L-Band Signal Management




Accessories

Patch Panels:


Features:

- ▶ Various patch panel configurations available (F and BNC)
- ▶ Contact factory for custom configurations

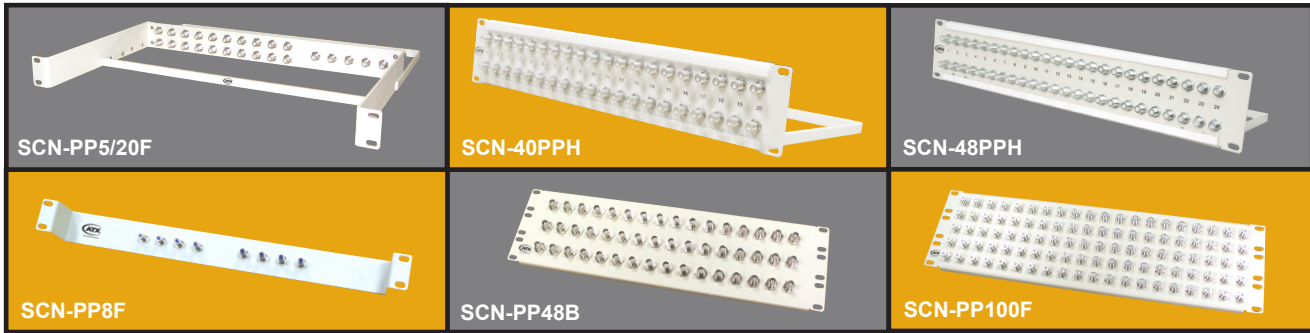

Ordering Information

| Part Number | Description |
|--------------|---|
| SCN-PP8F | 8-Port Patch Panel |
| SCN-PP16F | 1RU, 16-Port Patch Panel, F Connectors |
| SCN-PP16F-MN | 1RU, 16-Port Patch Panel, F Connectors, MAXNET® Profile |
| SCN-PP48F | 3RU, 48-Port Patch Panel, F Connectors |
| SCN-PP48B | 3RU, 48-Port Female-to-Female Patch Panel, BNC Connectors |
| SCN-PP100F | 3RU, 100-Port Female-to-Female Patch Panel, F Connectors |
| SCN-PP100B | 3RU, 100-Port Female-to-Female Patch Panel, BNC Connectors |
| SCN-PP100FD | 3RU, 100-Port Patch Panel, F Connectors, Inset 12" |
| SCN-PP100BD | 3RU, 100-Port Patch Panel, BNC Connectors, Inset 12" |
| SCN-PP5/20F | 1RU, 25-Port Patch Panel (5/20), F Connectors with Cable Bars |
| SCN-PP20F | 1RU, 20 Port Patch Panel, F Connectors |
| SCN-40PPH | 2RU, 40-Port Patch Panel with F Ports, Designation Strips & Cable Bar |
| SCN-48PPH | 2RU, 48-Port Patch Panel with F Ports, Designation Strips & Cable Bar |

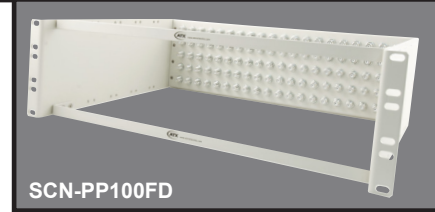

In-Line Attenuators:



| SPECIFICATIONS | FREQUENCY | 1 dB | 2 dB | 3 dB | 6 dB | 10 dB | 20 dB |
|-----------------------|------------------------------|-----------|-----------|-----------|-----------|------------|------------|
| | ATTENUATION & TOLERANCE (dB) | 5-300 MHz | 1.0 ± 0.5 | 2.0 ± 0.5 | 3.0 ± 0.5 | 6.0 ± 0.5 | 10.0 ± 0.5 |
| | 300-400 MHz | 1.0 ± 0.5 | 2.0 ± 0.5 | 3.0 ± 0.5 | 6.0 ± 0.5 | 10.0 ± 1.0 | 20.0 ± 1.0 |
| | 400-600 MHz | 1.0 ± 0.5 | 2.0 ± 0.5 | 3.0 ± 0.5 | 6.0 ± 0.5 | 10.0 ± 1.0 | 20.0 ± 1.0 |
| | 600-1000 MHz | 1.0 ± 1.0 | 2.0 ± 1.0 | 3.0 ± 1.0 | 6.0 ± 1.0 | 10.0 ± 1.0 | 20.0 ± 1.0 |
| MIN. RETURN LOSS (dB) | 5-300 MHz | 26 | 26 | 26 | 26 | 26 | 26 |
| | 300-1000 MHz | 20 | 20 | 20 | 20 | 20 | 20 |

Ordering Information

| Part Number | Description |
|-------------|--|
| SCN*PD | Input Attenuators (*specify value - 1, 2, 3, 6, 10 or 20 dB) |



Specifications subject to change without notice.

