


## Controller Module:

### Features:

- ▶ Hot-swappable
- ▶ Provides local & remote status monitoring functions of chassis
- ▶ Front access to local CLI port for DSP-HHU hand-held controller
- ▶ Remote access enabled via SNMP v2c, Web GUI & Telnet

Installed in the front center slot of a ChromaFlex chassis, the controller module provides all of the status monitor & control functions needed for the eight application module slots.

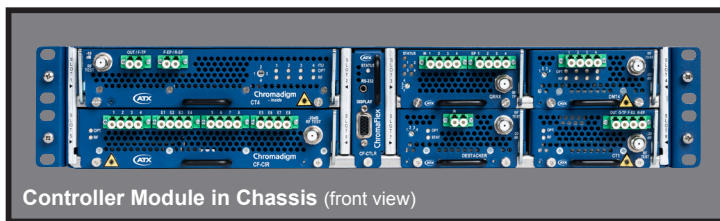

Controller Module in Chassis (front view)



Controller Module (front view)

## Controller Module Specifications

SPECIFICATIONS	
NETWORK MANAGEMENT	
LOCAL	GUI or CLI
REMOTE	GUI, Telnet, SNMP v2c
ENVIRONMENTAL	
OPERATING TEMPERATURE	0°C to +50°C (+32°F to +122°F)
STORAGE TEMPERATURE	-40°C to +85°C (-40°F to +185°F)
HUMIDITY	5-85% Non-condensing
PHYSICAL	
DIMENSIONS	3.4"H x 0.9"W x 13.2"D (8.6H x 2.3W x 33.5D cm)
WEIGHT	0.9 lbs (0.4 kg)

## Ordering Information

Part Number	Description
CF-CTLR	ChromaFlex Controller Module
DSP-HHU	Optional Hand-held Display Unit, Local Monitor & Control Interface, DB15 Cable Included

Specifications subject to change without notice.

